

**FFOB-V AN10**  
 Cast Alloy Lid & Frame  
 Includes Screw Cap with  
 Integral Rubber Gasket  
 Satin Silver with Black  
 Anti-Slip Detail

### AT A GLANCE

Capacity:	1 x Clipsal 2000
Gangbusters Series Style Power/	
Data/AV Outlet & 1 x Clipsal 2000	
Series Style Power/Data/AV Outlet	
Lid Material:	Cast Alloy
Lid Size:	260mm Diameter
Recess Size:	265 x 110mm Deep
Rating:	IPX6


EXCLUSIVE



DESIGN

### IPX6 RATED

## Features

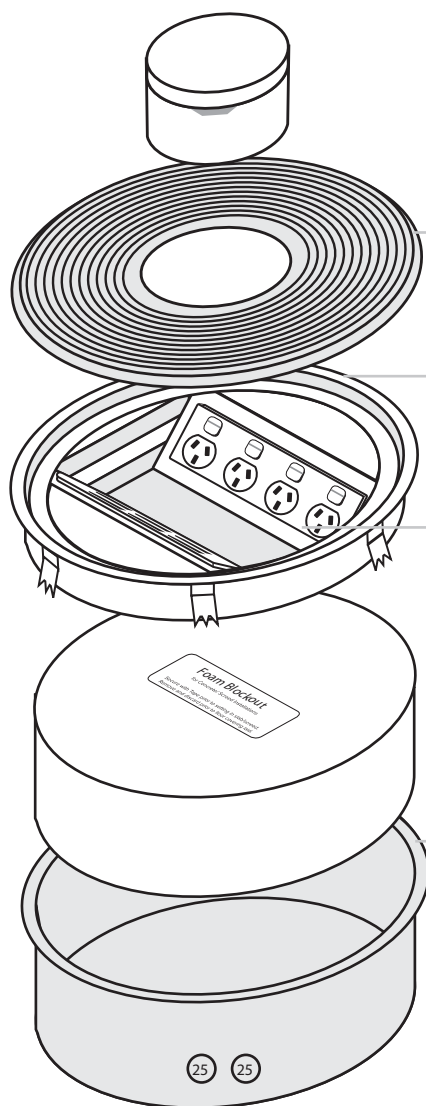

Cast Alloy Lid with Screw Cap and Integral Rubber Gasket Ring - Satin Silver with Black Anti-Slip Detail

Cast Alloy Frame Assembly with 10mm protective side edge - 260mm Diameter, attaches to body using fixing claws


Outlet Bracket to Suit 2 x Clipsal 2000 Series Style Power/ Data /AV Outlet or to Suit 2 x Clipsal 2000 Gangbusters Series Style Power/ Data /AV Outlet

Aluminium Canister - 245mm Diameter x 100mm deep. Has 4 x 25mm conduit knockouts. Includes Foam Blockout Insert for use during concrete pour only.


#### IMPOR TANT

In order to ensure IPX6 Rating, the underside of the floorbox frame must be sealed with an appropriate sealing compound when being fitted to the floor. The floorbox lid and rubber gasket ring must be free from debris when being closed in order to maintain correct seal.


Above View




Cut-Out Side View



Side Elevation



Complete Elevation



Typical Conduit Hole Location.  
 Size =25mm Conduit Knockouts

Outlets are not included. All Dimensions quoted are nominal only. Drawings, images and diagrams are for illustrative purposes only and are not to scale. Product details and dimensions are subject to change without notice. This product is not suitable for use in wet areas, is intended for use with fixed wiring only and must be installed by a licensed electrical mechanic in accordance with AS3000, SAA Wiring Rules and A.C.A Requirements



### Step 1: Prepare Area for Installation

#### Option 1. Slab/ Screed Installation

- Secure Aluminium Canister housing (245x100mm) to structural slab (recommended) or within preformed recess/blockout (265x110mm). Ensure Aluminium Canister is positioned to finish flush and level with final slab surface and is secured to prevent 'dipping' or 'floating' within screed
- Positioning and securing the Aluminium Canister accurately will prevent operation/installation problems at later stages
- Connect conduits to Aluminium Canister at desired location(s) and fill opening in canister using the Foam Blockout to prevent screed entering the box.

Important: Seal any gaps around conduit entries with sealant or duct tape prior to screeding it

#### Option 2. Raised/ TIMBER Floor

- Remove & Discard Aluminium Canister & Foam Blockout. Cut aperture (247mm Diameter) in floor at desired location.
- Special 'Clamp Style' Fixings are required for this method, as opposed to the 'Claw Style' Fixings supplied as standard. 5-15mm, 15-35mm & 35-50mm 'Clamp Style' fixings are available where standard 'Claw Style' fixings are considered unsuitable.

### Step 2: Floor box Lid Installation

- Remove Foam Blockout from Aluminium Canister (if not done so already when installing in a raised floor)
- Lay and trim floor surface (carpet, vinyl, tiles etc) to the size of the ALUMINIUM CANISTER OPENING
- Remove FFOB-VAN10 Lid from Frame Assembly.
- Fit FFOB-VAN10 Frame Assembly into the mounting space created in Step 1 by slackening 'Claw Style' or 'Clamp Style' fixings and then easing into place. Secure by tightening 'Claw Style' or 'Clamp Style' fixings until solid - do not overtighten.
- Terminate outlets as required (as per AS3000) fixing them to the mounting bracket supplied and ensuring all metal components maintain earth continuity
- Replace FFOB-VAN10 Lid onto FFOB-VAN10 Frame Assembly and test the operation of the unit. Floor coverings under the hinge may interfere with operation - trim any floor coverings clear of the hinging points.

Important: In order to ensure IPX6 Rating, the underside of the floorbox frame must be sealed with an appropriate sealing compound when being fitted to the floor. The floorbox lid and rubber gasket ring must be free from debris when being closed in order to maintain correct seal.